

DS-2CC132P/132N



Key features


- Compact Body Style.
- 1/4-Inch CMOS.
- Day/Night with Automatic Switch.
- Digital Signal Processing.
- Automatic White Balance, Automatic Gain Control, Electronic Shutter Control, and Backlight Compensation.
- Flickerless Mode.
- CS Lens Mount (C Mount Lenses Require Optional Adapter).
- Internal Synchronization.
- Advanced Engineering Design, High Reliability.

Specification

Parameter	Model	DS-2CC132P/132N
Image Sensor		1/4"CMOS
Signal System		PAL/NTSC
Effective Pixel		640 (H) ×480 (V)
Min. Illumination		0.1Lux @ F1.2
Electronic Shutter		1/25 S---1/15,000 S
Day&Night		Auto Switch
Auto Iris Lens		----
Lens Mount		C/CS Mount
Horizontal Resolution		480TVL
Synchronous		Internal Synchronization
Video Output		1Vp-p Composite Output (75Ω/BNC)
S/N Ratio		More than 48dB

BLC	ON/OFF
Working Temperature	-10°C--60°C
Power Supply	12V DC, ±10%
Power Consumption	2W MAX
Dimension (mm)	63×59×114
Weight	550g

Appearance

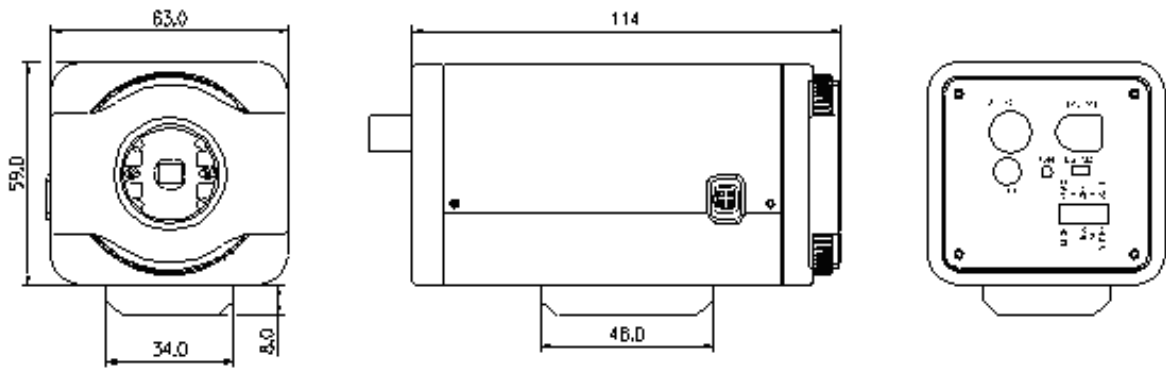

(Unit: mm)

