




## Walkthrough Metal Detector "WMD-1"

Art.-No.: 090007

WMD-1 was chosen, "The Best Deal" in Dubai Safety Exhibition-2001, with the norms it provides, it's specifications, performance and economic advantages. Here are some of the technical superiorities for WMD-1 :

- **International Norms (NILEC-0601 L1 / IP63/ IEC 348 Class1), in accordance with CE,**
- **MULTIZONE-9 Real Detection Zone,**
- **Auto Calibration,**
- **Green/Red Bicolor Traffic Through LEDs,**
- **LED Illuminated Warnings at the Control and Side Panels,**
- **10 Sensitivity Levels,**
- **246 adjustable levels at each, applicable to all zones, separately (Program 1 fixed to NILEC - NC),**
- **Graphic Display,**
- **Display of Metal Density at 10 level (green/yellow/red) VU meter,**
- **Environment Magnetic Noise Level Detection Display,**
- **Adjustable Audio Warning,**
- **Alarm Counter,**
- **In & Outgoing Counters separately at 5 Digits (Visible/Invisible),**
- **Lock For Control Panel and 4 Digit Changeable Pin Code,**
- **Automatic Failure Display,**
- **UPS- Uninterrupted Power Supply,**
- **Reloading the Factory Default Settings by 1 touch button,**
- **Easy Programming & Monitoring with LCD display**
- **Standard Menu in 4 Languages (English, German, Turkish and Spanish),**
- **Relay Outputs,**
- **Modem and RS232 Output,**
- **Unique Designs & in variety of colours.**



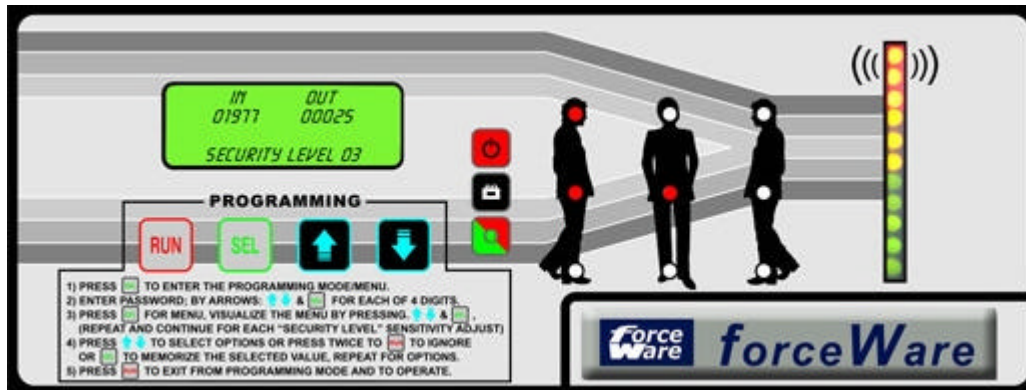

## Specification:

Power / earthed	110 – 260 VAC Switching PS			
Consumption / Noise suppression	Stand-by 10VA / max. 19VA			
Environmental conditions	-20°C - +70°C – 95% B.Nem Humidity			
Total weight net/gros	33/39 kg			
Dimensions (cm)	kg	Width	Lenght	Height
Passage		76cm	50cm	200cm
External		83cm	50cm	220cm
Packed in 2 boxes I/II	30/9	224/80cm	52/19cm	18/18cm
Warranty	2 years			
Spare part guarantee	10 ears			
Distance from moving metals	min. 100cm			
Noise suppression	VDE871			
Security class	IEC348			
No effect to pacemakers and to magnetic media				
CE – certified				

Distributed World Wide by Sandown Wireless, USA  
 Tel.: 603-548-0125 Fax: 603-887-2117  
 e-mail: [sales@criticalresponder.com](mailto:sales@criticalresponder.com)  
 internet: [www.criticalresponder.com](http://www.criticalresponder.com)

